

T 230 SLIM

MOTORIZED VIP TURNSTILE

- Strong Mechanism
- Elegant Design
- Longlived
- Disabled Passage
- VIP Passage
- Spare Parts Support
- Logo Customization

T 230 SLIM MOTORIZED VIP TURNSTILE

T 230 M. VIP Slim Gate serves as an alternative passage lane for people with wheelchair and for other VIP passage purposes. Thanks to its stylish design and appearance, it can suit any interior.

Application

T 230 M. VIP Slim Gate can be installed in various interior locations like banks, ministries, administrative offices, public transportation centers, business centers and other similar sites as a VIP lane.

Basic Materials


T 230 M.VIP Slim Turnstile main body is made of 1.5 mm thick 304 stainless steel, wings with 10 mm plexy glass. Red / Green color indicator led is standard on the top cover. Also it is possible to apply logo on the wings. The electronic boards are designed by the qualified engineers of Makim, enabling T 230 M.VIP Slim Gate work in various modes and entegrations together with the special PLC.

General Usage

T 230 M.VIP Slim Gate motorized VIP gate works bi-directionally. Any kind of access control system like card reader, biometric reader, remote control unit or push button can be connected to T 230 M.VIP Slim via simple dry-contact. Once the access right is granted, T 230 M.VIP Gate will open automatically, in 90° width. The gate stays in open position for 15 seconds and then closes & locks itself again. This open-waiting time can be changed on the PLC settings. The T 230 M.VIP Slim Turnstile is suitable for disabled and VIP-purpose accesses, which are recommended to be installed next to the Makim tripod turnstiles to provide a lane for the main flow.

Safety

In case of power cut, T 230 M.VIP Slim Gate is unlocked to allow free passage in both directions. As an alternative, battery can be used to keep standard working mode of T 230 M.VIP Slim Gate for a certain while in case of power cut.

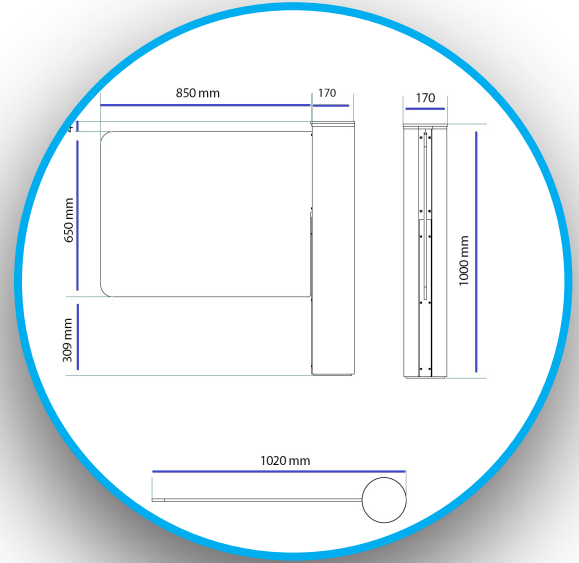

Control /Operation Voltage	24VDC +-%20
Power Consumption	30 W
Body	Stainless Steel
Operation Temperature	- 10° C - + 50° C
Dimensions (Body)	Ø 170 x1000 mm
Dimensions (Wing)	850 mm
Dimensions (Wing)	10 mm plexyglass
Weight	25 Kg
Locking	With 24 V DC electromagnetic brake
Control	24 V DC electronic control board with programming function
Installation	Simple & easy installation with a special pedestal

FACTORY

Address: Sincan Organize Sanayi Bölgesi,
Erkunt Cd. No: 20 06930 Sincan / Ankara
Phone: +90 (312) 267 56 87 Fax: 0 (312) 267 56 99
satis@makim.com.tr

ANKARA SALES OFFICE

Address: Batı Sitesi Mah. Gersan, 2307 Sk/3.Cad.
No:16 06970 Ergazi / Ankara
Phone: +90 (312) 257 02 52 Fax: 0 (312) 257 02 55
pazarlama@makim.com.tr

BRANCH

Address: Perpa Ticaret Merkezi, B Blok
Kat: 7-8 No: 987-989 Şişli İstanbul
Phone: +90 (212) 210 29 41 Fax: 0 (212) 210 68 15
sube@makim.com.tr

WAREHOUSE AND TECHNICAL DELIVERY

Address: Perpa Ticaret Merkezi, B Blok
Kat: 1-2 No:57 Şişli İstanbul
Phone: +90 (212) 210 29 41 Fax: 0 (212) 210 68 15
sube@makim.com.tr